
STOP












ARCADE


BOWES
ARCADE




P
2 HOUR LIMIT




WARNING


WARNING
Security
Cameras In Use
Advanced
ALARM SYSTEMS


WARNING
Security
Cameras In Use
Advanced




COCKTAIL




STOP


STOP
ALL WAY
AXIS SALON
23


P
2 HOUR LIMIT
23


HOURS
Valley Eats


OP
AXIS


23


STOP


STOP


K YOUR LIPS
R OUR WRAP
Tender
ess butter
n, rice and
epper
d in
TRY
SOMETHING NEW
TODAY
Basmati rice,
diced chicken
breast mixed
with house mad
sauce and
seasonal veggies.
CHICKEN
FRIED RICE
FISH
&
CHIPS
THE BEST CHOICE IN
"SMITHS FALLS"
In house beer
battered Haddock
fillet fried to
golden perfection
and served over
potatoes fires
with a side of
coleslaw and
tartar sauce
MUST TRY
Boneless thin
sliced beef pre-
marinated in chef
signature spices
fired to
perfection. Then,
tossed in pan
with sautéed
onion, bell
pepper and garlic
CEYLON BEEF
VARUVAL
TANDOORI
BUTTER PAPER
DOSA
CRISPY, SAVORY
TREAT
ALWAYS FRESH
& DELICIOUS
ALLA
VODKA


BUTTER
CHICKEN


YORK
BUTTER
CHICKEN


ARCADE










Welcome
PRIVATE PROPERTY NO PARKING
NISSAN
CBWS 236
ONTARIO
CA 89426


Welcome
YORK
PRIVATE PROPERTY
NO PARKING


BUTTER
CHICKEN
CWBY 417
CHYP 622


SOLD
FOR SALE
TEGAN
MACKEY
613-340-3045
RE/MAX


FOR LEASE
TEGAN
MACKEY
613-340-3045
RE/MAX






32






BOWIES
ARCADE


YORK












YORK


YORK®


YORK


CAUTION
ATTENTION




IRON FORGE
PIZZA
BOWIE'S
ARCADE


IRON FORGE
PIZZA
BOWES
ARCADE


YORK








ICP COMMERCIAL
DO NOT TRUCK THIS END


ICP COMMERCIAL
DO NOT
TRUCK
THIS END
FLUSH TO CURB

INTERNATIONAL COMFORT PRODUCTS, LLC

RGS090HEA0AAAA

P141442103

ICP

CSA

ETL

AHRI CERTIFIED

www.ahridirectory.org

	1	208/230	3	60	13.6	83	8.3		3.9		450	4481.5
	1	208/230	3	60	13.6	83	8.1		3.7		450	5102.6
	2	208/230	1	60	1.5							
	1	208/230	3	60	8.4/8.3							
	1	208/230	1	60	9.45	256/230	3	60	253		187	

C4PWREXH

021A, 026A	208/230	1 60	3.8	42/42	50/50		44/44	7.44
				46/46	50/50		49/49	256

CONTROL PANEL SC, TRANSFORMER VOLTAGE 230 V

	0	0	1	75	0	0	48	1719
	1	0	1	25	1	0	48	1219

35 – 65		1					165			
15.4 – 36.1		0.25					73.5			
120000		180000		148000						
35.2		52.8		43.4			82.0	NATURAL		
		13	–	3.24	–	4				
		3.5	–	0.87	–	2		0.5		

	83000	24.3	11	

ASHRAE 90.1 COMPLIANT

ICP COMMERCIAL

DO NOT TRUCK THIS END

INTERNATIONAL COMFORT PRODUCTS, LLC

RGS090HECADAAAA – – –

P141442103

ICP

CSA

COMP A	1	208/230	3	60	13.6	83	8.3	3.8	650	4481.5
COMP B	1	208/230	3	60	13.6	83	8.1	3.7	450	3102.6
EVAP MOT	2	208/230	1	60	1.5					
COND FAN	1	208/230	3	60	0.4/0.3					
PWR SUPPLY	1	208/230	1	60	0.46	208/230	3	60	253	187

CRPWR03H

022A, 022EA	208/230	1	60	3.8	42/42	50/50	–	44/44	246
					46/46	50/50	–/–	49/49	250

CONTROL PANEL SCCR: 5kA RMS SYMMETRICAL VOLTAGE 253 MAX

COND COIL	0 in 0 MM		1 25 MM		0 in 0 MM			48 in 1219 MM	
EVAP COIL	0 in 0 MM		1 25 MM		0 in 0 MM			48 in 1219 MM	

AIRFLOW	MAX EXTERNAL STATIC PRESSURE	DESIGNED MAXIMUM OUTLET AIR TEMPERATURE
35 – 65 °F	1 in. W.C.	165 °F
19.4 – 36.1 °C	0.25 kPa	73.9 °C

	INPUT MIN	INPUT MAX	OUTPUT CAP	THERM. EFF (%)	GUARANTEED AFUE (%)
BTU/H	120000	180000	148000		
MJ/h	35.2	52.8	43.4	82.0	NATURAL

GAS SUPPLY PRESSURE	13 W.C.	3.24 kPa	MAX	4 W.C.	1 kPa	MIN
MANIFOLD PRESSURE	3.5 W.C.	0.87 kPa		2 W.C.	0.5 kPa	

ETL LISTED

C ETL US 4009540

COOLING PORTION CONFORMS TO UL – 1995

HEATING PORTION CONFORMS TO ANSI Z21.47, CSA 2.3-2007

AHRI CERTIFIED

C www.ahridirectory.org

	CAPACITY Btu/H	CAPACITY kW	EER	COP
COOLING	83000	24.3	11	
HP HEATING				

THIS EQUIPMENT COMPLIES WITH THE 2007 REQUIREMENTS OF ASHRAE 90.1

ASHRAE 90.1 COMPLIANT

ENGINEERED IN USA
ASSEMBLED IN MEXICO
DATE OF MANUFACTURE Apr – 2014

ICP™ COMM


R-410A
Refrigerant
NOTICE
BOWIES
ARCADE


R-410A
Refrigerant
NOTICE
Remove wood support from under base pan before setting unit on roof curb.


NOTICE / AVIS


YORK


YORK
FAST


IRON FORGE
BOWIES
ARCADE


FloAire
FAST
KITCHEN HOODS


IRON FORGE
PIZZA
BOWIES
ARCADE






Goodman










Goodman
DS CPA
Professional Corp
ERECTED
A.D.1894


Goodman










DS CPA
Professional Corp
IRON FORGE
PIZZA
30


DS CPA
Professional Corp



⚠ CAUTION
HANDLING INSTRUCTIONS

⚠ ATTENTION
INSTRUCTIONS POUR LA MANUTENTION

⚠ CAUTION

Use extreme caution when opening or removing doors in windy conditions.

Replace and securely latch all doors before operating unit.

⚠ ATTENTION

Faire preuve d'extrême prudence lors de l'ouverture ou de la dépose des portes par grand vent. Remettre en place et verrouiller complètement toutes les portes avant d'utiliser l'unité.

WARNING ⚠ AVERTISSEMENT

Electric Shock Hazard

Can cause severe personal injury or death

Turn off electrical power before removing this panel.

Service must be performed by a qualified service person.

Risque de choc électrique

Reut causer des blessures graves ou la mort

Couper le courant avant d'enlever ce panneau.


Seul un technicien qualifié peut effectuer l'entretien.

Important

If power has been turned off 8 hours or more, disconnect switch must be turned ON 8 hours before thermostat is set to "HEAT," "COOL," or "AUTO."

Si le courant est coupé pendant plus de 8 heures, le sectionneur doit être ACTIVÉ durant 8 heures avant de placer le thermostat sur «HEAT», «COOL» ou «AUTO».

Notice to Installer	Avis a l'installateur
For access to unit instructions remove this panel.	Pour avoir accès aux elements d'instructions enlever ce panneau.

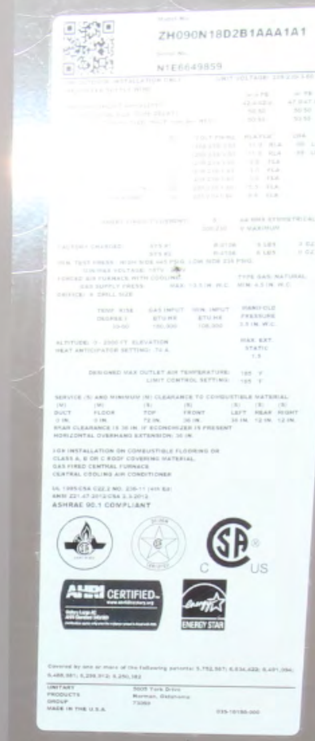



⚠ ATTENTION

aire preuve d'extrême prudence lors
e l'ouverture ou de la dépose des
ortes par grand vent. Remettre en
ace et verrouiller complètement
utes les portes avant d'utiliser
nité.

10461 / 035-09281B REV. B

VERTISSEMENT

Risque de choc électrique

Reut causer des blessures graves ou la mort

Couper le courant avant d'enlever ce panneau.

Seul un technicien qualifié peut effectuer l'entretien.

rtant

Si le courant est coupé pendant plus de 8 heures, le sectionneur doit être ACTIVÉ durant 8 heures avant de placer le thermostat sur «HEAT», «COOL», ou «AUTO».

10482 / 035-10171-000C

Avis a l'installateur

Pour avoir accès aux elements d'instructions enlever ce panneau.

10342 / 035-06993-000

Model No.:

ZH090N18D2B1AAA1A1

Serial No.:

N1E6649859

FOR OUTDOOR INSTALLATION ONLY — UNIT VOLTAGE: 208/230-3-60
USE COPPER SUPPLY WIRE

	w/o PE	w/ PE
MINIMUM CIRCUIT AMPACITY:	42.4/42.4	47.9/47.9
MAXIMUM FUSE SIZE (TIME DELAY):	50/50	50/50
MAX. CIRCUIT BRKR SIZE (HACR type per NEC):	50/50	50/50

QTY	LOAD	HP	VOLT-PH-HZ	RLA/FLA	LRA
1	COMP #1		208/230-3-60	11.9 RLA	88 LRA
1	COMP #2		208/230-3-60	11.9 RLA	88 LRA
1	ID BLOWER	3.0	208/230-3-60	9.6 FLA	
1	OD FAN #1	3/4	208/230-1-60	3.0 FLA	
1	OD FAN #2	3/4	208/230-1-60	3.0 FLA	
1	[illegible] MTR	3/4	208/230-1-60	5.5 FLA	
1	[illegible]	1/12	208/230-1-60	0.5 FLA	

SHORT CIRCUIT CURRENT: 5 kA RMS SYMMETRICAL,
208/230 V MAXIMUM

FACTORY CHARGED: SYS #1 R-410A 6 LBS. 0 OZ.
SYS #2 R-410A 6 LBS. 0 OZ.
MIN. TEST PRESS.: HIGH SIDE 445 PSIG, LOW SIDE 236 PSIG.
MIN/MAX VOLTAGE: 187V / 253V
FORCED AIR FURNACE WITH COOLING. TYPE GAS: NATURAL.
GAS SUPPLY PRESS: MAX: 10.5 IN. W.C. MIN: 4.5 IN. W.C.
ORIFICE: # DRILL SIZE

TEMP. RISE DEGREE F	GAS INPUT BTU/HR	MIN. INPUT BTU/HR	MANIFOLD PRESSURE
30-60	180,000	108,000	3.5 IN. W.C.

ALTITUDE: 0 - 2000 FT. ELEVATION
HEAT ANTICIPATOR SETTING: .74 A.

MAX. EXT. STATIC 1.5

DESIGNED MAX OUTLET AIR TEMPERATURE: 185 °F
LIMIT CONTROL SETTING: 165 °F

SERVICE (S) AND MINIMUM (M) CLEARANCE TO COMBUSTIBLE MATERIAL

(M) DUCT	(M) FLOOR	(S) TOP	(S) FRONT	(S) LEFT	(S) REAR	(S) RIGHT
0 IN.	0 IN.	72 IN.	36 IN.	36 IN.	12 IN.	12 IN.

REAR CLEARANCE IS 36 IN. IF ECONOMIZER IS PRESENT
HORIZONTAL OVERHANG EXTENSION: 36 IN.

FOR INSTALLATION ON COMBUSTIBLE FLOORING OR
CLASS A, B OR C ROOF COVERING MATERIAL.
GAS FIRED CENTRAL FURNACE
CENTRAL COOLING AIR CONDITIONER

UL 1995/CSA C22.2 NO. 236-11 (4th Ed)
ANSI Z21.47-2012/CSA 2.3-2012
ASHRAE 90.1 COMPLIANT

AHRI CERTIFIED www.ahridirectory.org
Unitary Large AC
AHRI Standard 340/360

ENERGY STAR

Covered by one or more of the following patents: 5,752,567; 6,634,422; 6,491,094; 6,488,081; 6,298,912; 6,250,382

UNITARY PRODUCTS GROUP
MADE IN THE U.S.A.

5005 York Drive
Norman, Oklahoma
73069

035-16186-000

GROUP 73069
MADE IN THE U.S.A. 035-16186-000

Model No.:

ZH090N18D2B1AAA1A1

Serial No.:

N1E6649859

USAGE EXTERIEUR SEULEMENT — 208/230-3-60
UTILISER LE FIL EN CUIVRE FOURNI

	w/o PE	w/ PE
AMPERAGE MINIMUM DE CIRCUIT:	42.4/42.4	47.9/47.9
TAILLE MAXIMUM DE FUSIBLE (DE RETARD):	50/50	50/50
TAILLE MAXIMUM DE DISJONCTEUR:	50/50	50/50

QTE	CHARGE	HP	VOLT-PH-HZ	RLA/FLA		LRA
1	COMP #1		208/230-3-60	11.9	RLA	88 LRA
1	COMP #2		208/230-3-60	11.9	RLA	88 LRA
1	VENT. INT.	3.0	208/230-3-60	9.6	FLA	
1	VENT. EXT#1	3/4	208/230-1-60	3.0	FLA	
1	VENT. EXT#2	3/4	208/230-1-60	3.0	FLA	
1	EXHAP. MEC.	3/4	208/230-1-60	5.5	FLA	
1	VENT. DEVAC.	1/12	208/230-1-60	0.5	FLA	

COURANT DE COURT CIRCUIT: 5 kA RMS SYMMETRIQUE,
208/230 V MAXIMUM

CHARGE A L'USINE SYS #1 R-410A 6 LBS. 0 OZ.
SYS #2 R-410A 6 LBS. 0 OZ.
PRESSION TESTÉE EN MIN: HAUTE 445 PSIG
BASSE 236 PSIG
FOUR CENTRAL CHAUFFE AU GAZ
AVEC SYSTEME DE REFRIGERATION
GAZ-NATUREL
PRESSION D'ALIMENTATION DE GAZ: 10.5 POUCES D'EAU MAX.
4.5 POUCES D'EAU MIN.
ORIFICE: TAILLE 37

AUGMENTATION DE TEMP DE L'AIR (F)	TOTAL CAPACITÉ A L'ENTRÉE BTU/HR	MINIMUM CAPACITÉ A LA SORTIE BTU/HR	PRESSION DU DISTRIBUTEUR
30-60	180,000	108,000	3.5 IN. D'EAU

ALTITUDE: 0 - 2000 PIEDS D'ELEVATION
RÉGLAGE DE L ANTICIPATEUR DE CHALEUR: .74 A.

PRESSION MAX EXT STATIQUE EN POUNCES D'EAU: 1.5

TEMP. DE L'AIR DE SORTIE: 185
REGLAGE DE CONTROLE LIMITE: 165
ESPACE DE SERVICE (S) ET MINIMUM (M) DISPONIBLE POUR LE COMBUSTIBLE (POUCE)

(M) CONDUIT	(M) SOL	(S) DESSUS	(S) AVANT	(S) GAUCHE	(S) ARRIERE	(S) GAUCHE
0	0	72	36	36	12	12

LE DÉGAGEMENT ARRIERE EST DE 36 POUCES SI LE ÉCONOMISEUR EST INSTALLÉ
RALLONGE DE SUSPENSION HORIZONTALE: 36 IN.
POUR L'INSTALLATION SUR LES SOLS COMBUSTIBLES OU LES MATERIAUX DE REVETEMENT DE TOIT DE CLASSE A, B, OU C.
FOUR CENTRAL CHAUFFE AU GAZ
CLIMATISEUR CENTRAL

UL 1995/CSA C22.2 NO. 236-11 (4th Ed)
ANSI Z21.47-2012/CSA 2.3-2012
ASHRAE 90.1 COMPLIANT

AHRI CERTIFIED www.ahridirectory.org
Unitary Large AC
AHRI Standard 340/360

UNITARY PRODUCTS GROUP
MADE IN THE U.S.A.

5005 York Drive
Norman, Oklahoma
73069

035-16186-000

YORK®

R-410A

CAUTION

This system contains high pressure R-410A refrigerant.

Pressures may exceed the rated working pressures of R-22 service equipment.

Refer to Product information inside this panel Before Installing or Servicing this unit...

CAUTION

Use extreme caution when opening or removing doors in windy conditions.

Replace and securely latch all doors before operating unit.

ATTENTION

Faire preuve d'extrême prudence lors de l'ouverture ou de la dépose des portes par grand vent. Remettre en place et verrouiller complètement toutes les portes avant d'utiliser l'unité.

FILTERS

Replace with same size filter as specified for unit.

FILTRES

Remplacer par des filtres de même taille, suivant les spécifcations de l'unité.

R-410A

CAUTION

This system contains high pressure R-410A refrigerant.

Pressures may exceed the rated working pressures of R-22 service equipment.

Refer to Product information inside this panel **Before Installing or Servicing this unit.**




YORK
ERECTED
A.D.1884
30


BOWIES
ARCADE
ERECTED
A.D.1894
30
30


ERECTED
A.D. 1894
30
36




30
30




WARNING




BOWES
ARCADE

STOP


ERECTED
A.D.1899
30
TRINITY
STOP


ERECTED
A.D.1894
BOWIE'S
ARCADE
TRINITY












DS CPA
Professional Corp
PIZZA




DS CPA
Professional Corp






YORK






BOWIES
ARCADE








DS CPA
Professional Corp
IRON FORGE
PIZZA


GMC




GMC


RE/MAX
AFFILIATES REALTY LTD. BROKERAGE
PARKING
ONLY
VIOLATORS WILL BE TOWED






Bell
Molson


BONES
ARCADE
ROCKBLADE
ROCK 787 R/T


FORGE
BOWIES
ARCADE
BUTTER CHICKEN
DHBH 150




IRON FORGE
PIZZA
BOWES
ARCADE


BUTTER
CHICKEN


ARCADE
BUTTER
CHICKEN




We're Open!
WELCOME TO
DOWNTOWN
SMITHS FALLS
VISA
NO SMOKING
NO VAPING
FREE Wi-Fi
PULL


We're Open!
WELCOME TO
DOWNTOWN
SMITHS FALLS
VISA
PULL